

THREE PHASE BLOWERS

Aluminium construction, smooth airflow and maintenance free operation. Our industrial three phase blowers range from 0.55kW to 7.5kW with flowrates over 500m³/hr.

We recommend replacing the inlet filter every 12-24 months depending on condition.

Can be supplied "ready to go" with inlet filter, pressure relief valve protection and hose tail.


Other models/sizes available upon request.



Key Features



Model	kW Rating	Voltage	FLC (A)	Freeflow	Max Δ P	Port size
SCB4-47-0.55kW-3PH	0.55kW	230/400V	2.45 Δ/1.42 Y	47m ³ /hr	290mbar(g)	1 1/4" BSP
SCB4-87-1.1kW-3PH	1.1kW	230/400V	3.9 Δ/2.25 Y	87m ³ /hr	350mbar(g)	1 1/4" BSP
SCB2-150-2.2kW-3PH	2.2kW	230/400V	8.1 Δ/4.6 Y	150m ³ /hr	410mbar(g)	1 1/2" BSP
SCB2-230-3.0kW-3PH	3.0kW	230/400V	11.4 Δ/6.5 Y	230m ³ /hr	360mbar(g)	2" BSP
SCB2-320-4.0kW-3PH	4.0kW	400/690V	8.4 Δ/4.8 Y	320m ³ /hr	320mbar(g)	2" BSP
SCB2-320-5.5kW-3PH	5.5kW	400/690V	11.1 Δ/6.4 Y	320m ³ /hr	460mbar(g)	2" BSP
SCB2-520-7.5kW-3PH	7.5kW	400/690V	15.0 Δ/8.7 Y	520m ³ /hr	350mbar(g)	2 1/2" BSP

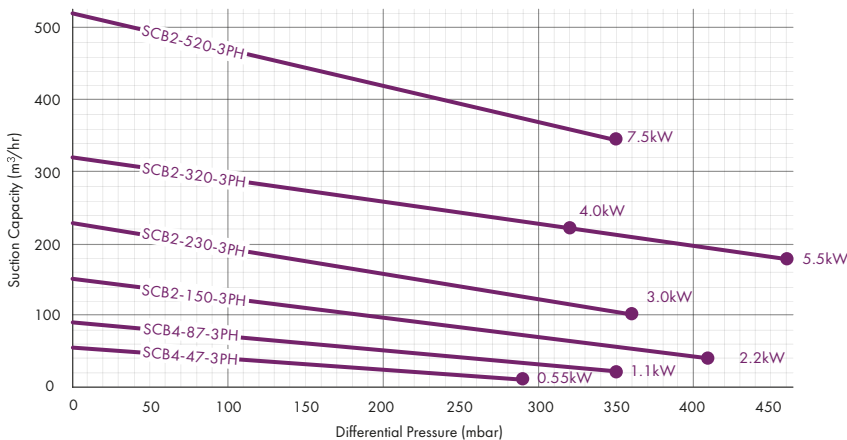

enviro[®] SCB Series